



EC series Inground light

EC series Inground light



Asymmetric Lighting



Precision Anti-glare




Full-aluminum Housing



Dual Breathing Valve



Unique Minimalist Luminous Surface

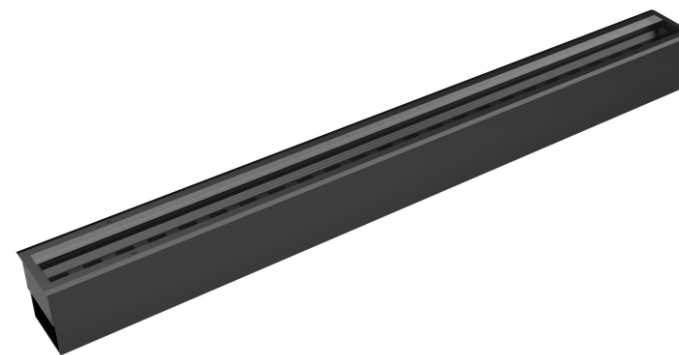


EC-65-01/LED Inground light




Size:

Unit (mm)

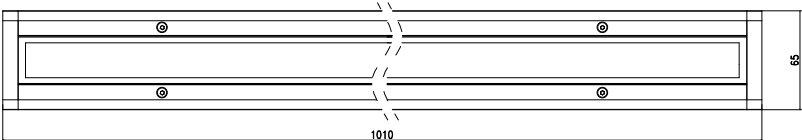

cutout size: L1005*W55*H70mm±1mm



EC-65-01/LED Inground light

Features:

- 1.Ultra-narrow frame and minimalist lamp body with design patent conforms to modern industrial aesthetics standard
- 2.Dual waterproof breathing valve design enhances heat dissipation performance and completely avoids the water mist problem
- 3. Anti-glare system adopts 0.2mm precision grid deflection 85°precision cutting light patent technology
- 4. Unique asymmetric lighting distribution design presents the best light output effect
- 5.The 6063 all-aluminum body has reliable thermal conductivity

Parameter:



Fixture Parameter		LED Parameter	
Beam angle	20° 25° 30° 45°60°	LED chip	Lumileds/OSRAM
Case material/color	Aluminum/Black	LED Item	5050/2835
Cover material	Tempered glass	CCT	Single color/dual white/RGBW
IP rate	IP67	LED Life	50000h
Fixture power	12W/15W	Other Parameter	
Input voltage	DC24V	Cable size	5 pins rubber cable(power cable 1.0 mm²,signal cable 0.3mm²)
Power factor	----	waterproof connector	IP67 waterproof terminal
Light efficiency	70lm/w(white)	connector	φ1.5mm Gold-plated solid Pins
Pixel segment	1 pixel, 4 pixels,6 pixels,8 pixels	Cable length	150mm
Light angle	Non-adjustable	Fixing clip	Aluminum housing pre-buried
Cable location	From the bottom	Light distribution	
Series connection quantity	10pcs		
Control way	ON-OFF/DMX512		
Environment temperature	-30°C~+35°C		
Net weight	2.93kg		
Certification standards	GB7000.1-2015 GB7000.213-2008		

EC-75-01/LED Inground light



Size:

Unit (mm)

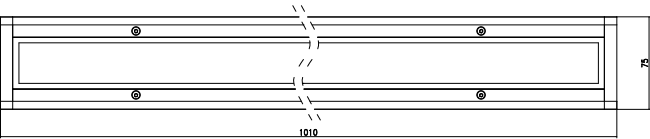

cutout size:L 1005*W65*H90mm±1mm

EC-75-01/LED Inground light


Features:

- 1.Ultra-narrow frame and minimalist lamp body with design patent conforms to modern industrial aesthetics standard
- 2.Dual waterproof breathing valve design enhances heat dissipation performance and completely avoids the water mist problem
- 3. Anti-glare system adopts 0.2mm precision grid deflection 85°precision cutting light patent technology
- 4. Unique asymmetric lighting distribution design presents the best light output effect
- 5. Breakthrough use of built-in 0.95 or higher efficiency DMX multi segment control system
- 6.The 6063 all-aluminum body has reliable thermal conductivity

Parameter:


Fixture Parameter		LED Parameter	
Beam angle	10° 20° 40° 60°	LED chip	Cree/OSRAM
Case material/color	Aluminum/Black	LED Item	CLQ6B/3030
Cover material	Tempered glass	CCT	Single color/dual white/RGBW
IP rate	IP67	LED Life	50000h
Fixture power	18W/24W	Other Parameter	
Input voltage	DC24V/AC220V	Cable size	5 pins rubber cable(power cable 1.0 mm²,signal cable 0.3mm²)
Power factor	0.95	waterproof connector	IP67 waterproof terminal
Light efficiency	80lm/w(white)	connector	φ1.5mm Gold-plated solid Pins
Pixel segment	1 pixel, 4 pixels,6 pixels,8 pixels	Cable length	150mm
Light angle	Non-adjustable	Fixing clip	Aluminum housing pre-buried
Cable location	From the bottom	Light distribution	
Series connection quantity	8pcs		
Control way	ON-OFF/DMX512		
Environment temperature	-30°C~+35°C		
Net weight	3.9kg		
Certification standards	GB7000.1-2015 GB7000.213-2008		

EC-90-01/LED Inground light

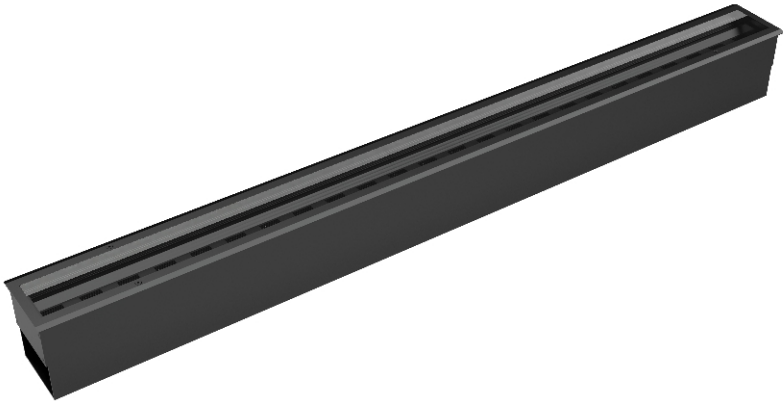


Size:

Unit (mm)

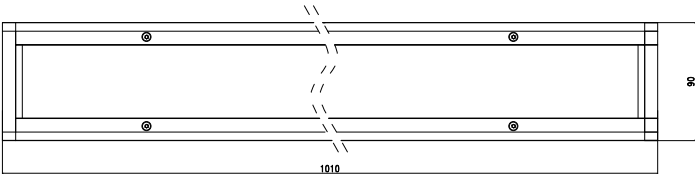

cutout size:L 1005*W80*H100mm±1mm



EC-90-01/LED Inground light


Features:

- 1.Ultra-narrow frame and minimalist lamp body with design patent conforms to modern industrial aesthetics standard
- 2.Dual waterproof breathing valve design enhances heat dissipation performance and completely avoids the water mist problem
- 3. Anti-glare system adopts 0.2mm precision grid deflection 85°precision cutting light patent technology
- 4. Unique asymmetric lighting distribution design presents the best light output effect
- 5. Breakthrough use of built-in 0.95 or higher efficiency DMX multi segment control system
- 6.The 6063 all-aluminum body has reliable thermal conductivity

Parameter:


Fixture Parameter		LED Parameter	
Beam angle	10° 20° 40° 60°	LED chip	Cree/OSRAM
Case material/color	Aluminum/Black	LED Item	XTE/CLQ6B
Cover material	Tempered glass	CCT	Single color/dual white/RGBW
IP rate	IP67	LED Life	50000h
Fixture power	36W/48W	Other Parameter	
Input voltage	DC24V/AC220V	Cable size	5 pins rubber cable(power cable 1.0 mm²,signal cable 0.3mm²)
Power factor	0.95	waterproof connector	IP67 waterproof terminal
Light efficiency	80lm/w(white)	connector	φ1.5mm Gold-plated solid Pins
Pixel segment	1 pixel, 4 pixels,6 pixels,8 pixels	Cable length	150mm
Light angle	Non-adjustable	Fixing clip	Aluminum housing pre-buried
Cable location	From the bottom	Light distribution	
Series connection quantity	4pcs		
Control way	ON-OFF/DMX512		
Environment temperature	-30°C~+35°C		
Net weight	4.62kg		
Certification standards	GB7000.1-2015 GB7000.213-2008		

EC-95-01/LED Inground light

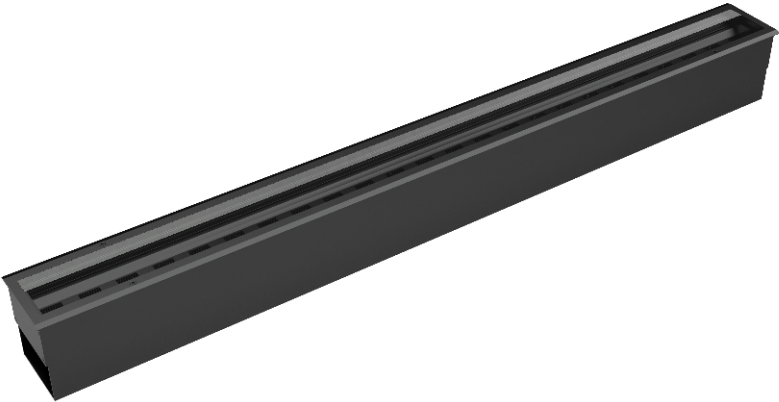

Size:

Unit (mm)

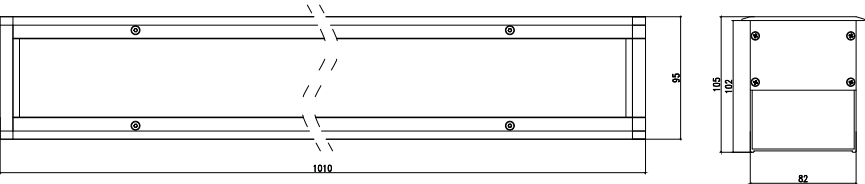


cutout size:L 1005*W85*H105mm±1mm

EC-95-01/LED Inground light

Features:

- 1.Ultra-narrow frame and minimalist lamp body with design patent conforms to modern industrial aesthetics standard
- 2.Dual waterproof breathing valve design enhances heat dissipation performance and completely avoids the water mist problem
- 3. Anti-glare system adopts 0.2mm precision grid deflection 85°precision cutting light patent technology
- 4. Unique asymmetric lighting distribution design presents the best light output effect
- 5. Breakthrough use of built-in 0.95 or higher efficiency DMX multi segment control system
- 6. The 6063 all-aluminum body has reliable thermal conductivity

Parameter:

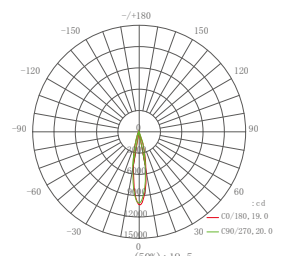Fixture Parameter		LED Parameter	
Beam angle	10° 20° 40° 60°	LED chip	Cree/OSRAM
Case material/color	Aluminum/Black	LED Item	XTE/3535
Cover material	Tempered glass	CCT	Single color/dual white/RGBW
IP rate	IP67	LED Life	50000h
Fixture power	54W/72W	Other Parameter	
Input voltage	DC24V/AC220V	Cable size	5 pins rubber cable(power cable 1.0 mm²,signal cable 0.3mm²)
Power factor	0.95	waterproof connector	IP67 waterproof terminal
Light efficiency	80lm/w(white)	connector	φ1.5mm Gold-plated solid Pins
Pixel segment	1 pixel, 4 pixels,6 pixels,8 pixels	Cable length	150mm
Light angle	Non-adjustable	Fixing clip	Aluminum housing pre-buried
Cable location	From the bottom	Light distribution	
Series connection quantity	2pcs		
Control way	ON-OFF/DMX512		
Environment temperature	-30°C~+35°C		
Net weight	5.54kg		
Certification standards	GB7000.1-2015 GB7000.213-2008		